

Printed Circuitry, Grid Boards for—Reference file CE-3.01; Fotoceram grid boards for prototype printed circuitry, with and without plug section.—*Corning Glass Works, Corning, New York.*

Relays, Photoelectric—Bulletin SCW-136, 2 pp., high-speed relays activated by increase or decrease of light; specifications, outline dimensions.—*General Electric Company, Schenectady 5, New York.*

Sample Cutter—Bulletin 1021, 2 pp.; test samples of various contours in paper, films, textiles, metal foils, rubber, and other sheet materials, using interchangeable dies.—*Thwing-Albert Instrument Company, Pennsylvania Street & Pulaski Avenue, Philadelphia 44, Pennsylvania.*

Switches, Sealed—Data sheet 195, 4 pp., selection of snap-action switches where corrosion or explosive vapors are hazards.—*Micro Switch, Freeport, Illinois.*

Switch, Time Delay—Model 5419, data sheet, self-powered, 2-12 hr $\pm 5\%$ between actuation and switch closure.—*Leeson Moos-Laboratories, 90-28 Van Wyck Expressway, Jamaica 18, New York.*

Thin-Film Deposition, Vacuum Equipment for—Bulletin 2-2, 28 pp., equipment and processes.—*Consolidated Vacuum Corporation, 1775 Mt. Read Boulevard, Rochester 3, New York.*

Transducers, Angle-Voltage—CO5.9101-9102 information sheet, for applications requiring synchro, resolver, or potentiometer output simulation as function of angular position; also polar to rectangular coordinate conversion.—*Kearfott Division, General Precision, Inc., Little Falls, New Jersey.*


Transformer Cases—A 2-p. bulletin of dimensions, materials, finishes, modifications of MIL-Standard cans.—*Kinetron Corporation, Shrewsbury & Patterson Avenues, Red Bank, New Jersey.*

Transistors, Switching & hf Amplifier—Bulletin PR-14, 6 planar epitaxial passivated silicon switching transistors with 40-nsec turn-on and 40-75 nsec turn-off time, and 4 hf amplifiers with high breakdown voltage and low leakage current; 17 performance charts.—*General Electric Company, Semiconductor Products Department, Electronics Park, Syracuse, New York.*

Tubing for Cold Forming, Specifying—A 4-p. reprint, mechanical and manipulative tests; comparative work-hardening rates of metals in small-tube form; mechanical properties of 29 tubing materials.—*Superior Tube Company, 1567 Germantown Avenue, Norristown, Pennsylvania.*

Tubing Research and Development—"Progress Through Performance," a 12-p brochure discussing capabilities in heat-transfer and nonferrous tubing; R and D facilities, equipment.—*Wolverine Tube Division, Calumet & Hecla, Inc., 17200 Southfield Road, Allen Park, Michigan.*

Here's the New P65 PHILBRICK OPERATIONAL AMPLIFIER

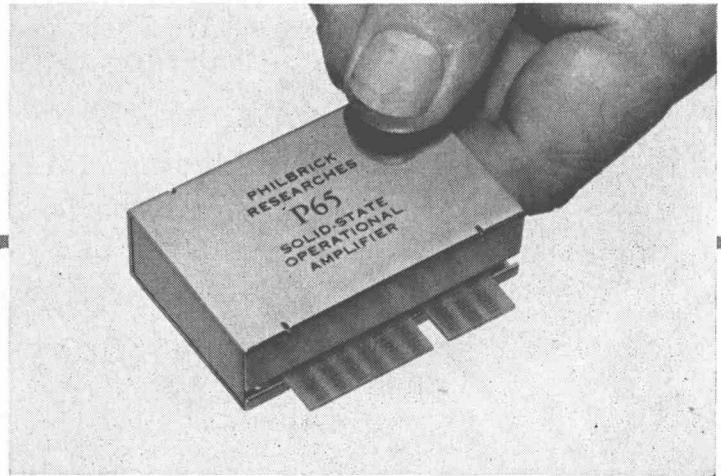

**All silicon plug-in,
highly reliable, low in cost**

Model P65 is yet another instance of Philbrick's ability to deliver superior performance at modest cost. Its differential inputs, wide pass band and 110°C operating temperature range offer a wide gamut of application possibilities. Typical features at room temperature:


- Differential input range: ± 10 volts
- Differential stability: less than 10^{-3} volts (0.01%)
- Unity gain crossover frequency: 1.6 Mc.
- Gain: 20,000
- Output range: ± 1.1 ma @ 10 volts
- Input current long term stability: 10^{-8} Amps.
- Size: $2\frac{1}{4}'' \times 1\frac{1}{2}'' \times \frac{3}{4}''$ plus edge connector
- Price: \$95*

Representatives in principal cities & overseas

GEORGE A. PHILBRICK RESEARCHES, INC.

127 Clarendon Street, Boston 16, Massachusetts
Commonwealth 6-5375 Telegraph: FAX BSN TWS: BS 1032

PHILBRICK makes the most complete line of operational amplifiers



*Domestic price. Mating connector supplied.
Write for quantity prices.

Export Office:
TERMINAL RADIO INTERNATIONAL LTD.
240 West 17 Street, New York 11, New York
Cable: TERM RADIO or TRIL RUSH